



ZF 335 A

7° Down angle, direct mount marine transmission.

Description

- Compatible with all types of engines and propulsion systems, including waterjets and surface-piercing propellers, as applicable .
- Design, manufacture and quality control standards comply with ISO 9001 and APQP .
- Fully works tested, reliable and simple to install .
- Reverse reduction integral marine transmission with hydraulically actuated multi-disc clutches .
- Robust design also withstands continuous duty in workboat applications .
- Suitable for high performance applications in luxury motoryachts, sport fishers, express cruisers and light duty applications. .

Features

- Case hardened and precisely ground gear teeth for long life and smooth running .
- Compact, space saving design; 7° down-angle and "Lambda" beveloid gear principle .
- Lightweight and robust aluminium alloy casings (sea water resistant) with integrated SAE 1 bell housing .
- Output shaft thrust bearing designed to take maximum propeller thrust astern and ahead .
- Replaceable oil filter cartridge .
- Smooth and reliable hydraulic shifting with control lever for attachment of push-pull cable .
- Suitable for twin engine installations (same ratio and torque capacity in ahead or astern mode) .

Options

- Adapter flange for SAE 0 connection .
- Electric clutch control (12 or 24 VDC) .
- Engine-matched torsional coupling .
- Mechanical or electrical trolling valve for slow-speed drive .
- Mounting brackets .
- Oil cooler complete with fittings and flexible oil hoses .
- Propeller shaft flange and coupling bolt sets .
- Live PTO's .
- Classification by all major Classification Societies on request .
- Supershift (with Autotroll and Easidock) .



ZF 335 A

Ratings

Pleasure Duty

RATIOS	MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	Nm	ftlb	kW	hp	2100 rpm		2300 rpm		2500 rpm		
					kW	hp	kW	hp	kW	hp	
1.441, 1.594, 1.767, 1.964, 2.192	2786	2055	0.2917	0.3912	613	822	671	900	729	978	3000
2.458	2555	1884	0.2675	0.3588	562	753	615	825	669	897	3000

* Special Order Ratio.

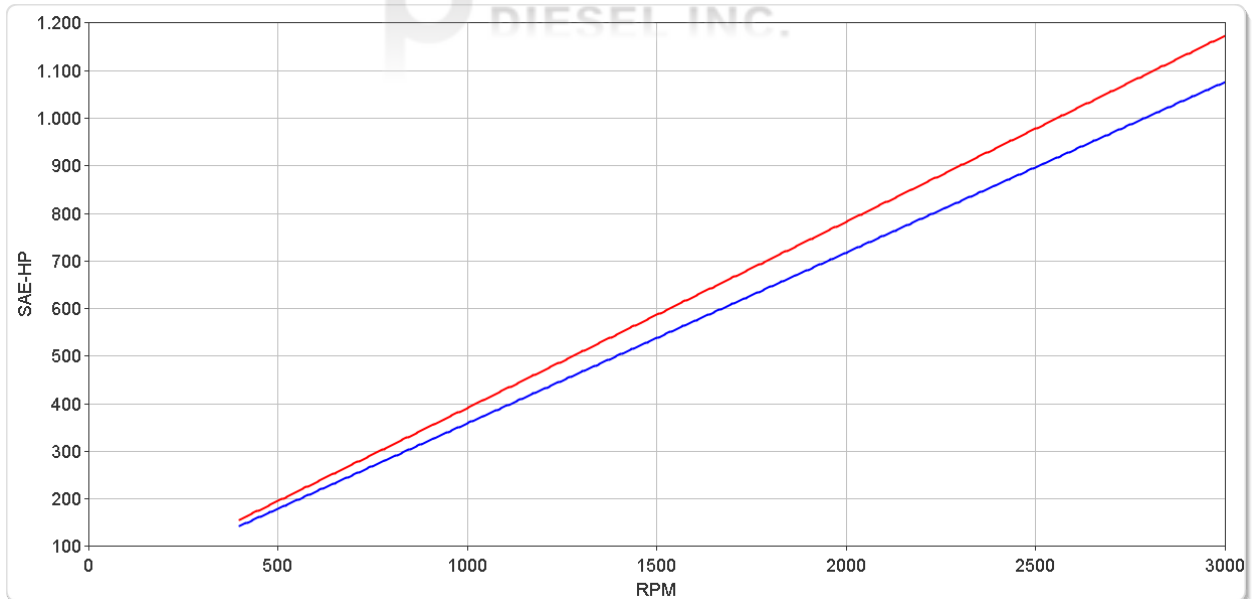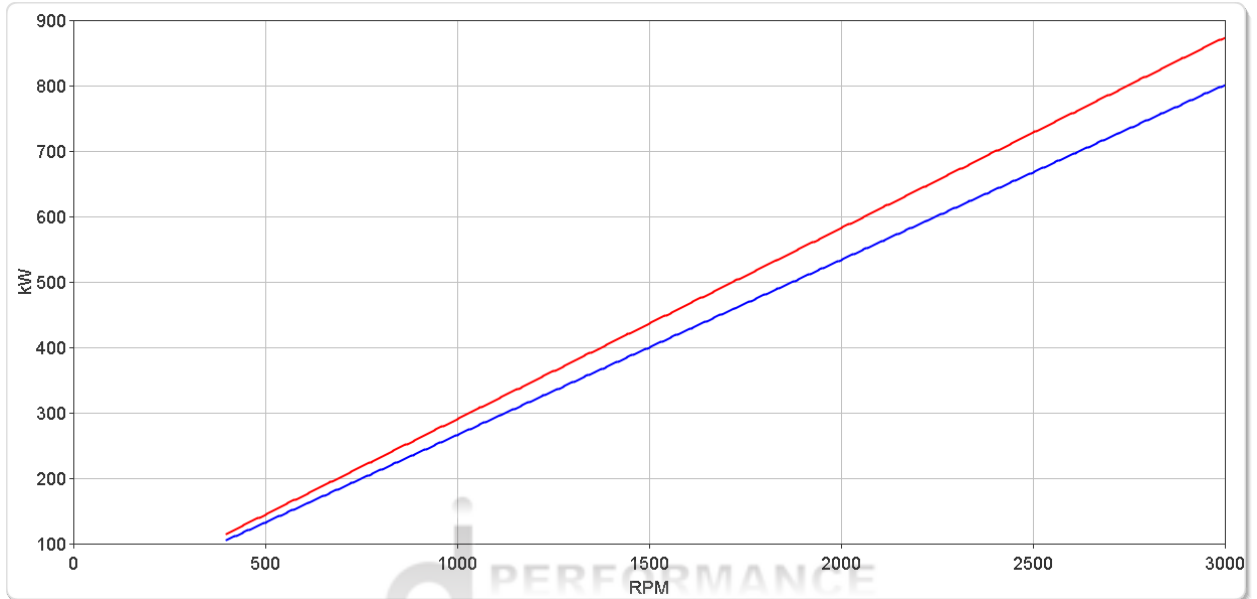



ZF 335 A

Ratings

Light Duty

	RATIOS	MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
		Nm	ftlb	kW	hp	2100 rpm		2300 rpm		2500 rpm		
						kW	hp	kW	hp	kW	hp	
■	1.441, 1.594, 1.767, 1.964	2540	1873	0.2660	0.3567	559	749	612	820	665	892	3000
■	2.192	2477	1827	0.2594	0.3478	545	730	597	800	648	870	3000
■	2.458	2323	1713	0.2432	0.3262	511	685	559	750	608	815	3000

* Special Order Ratio.

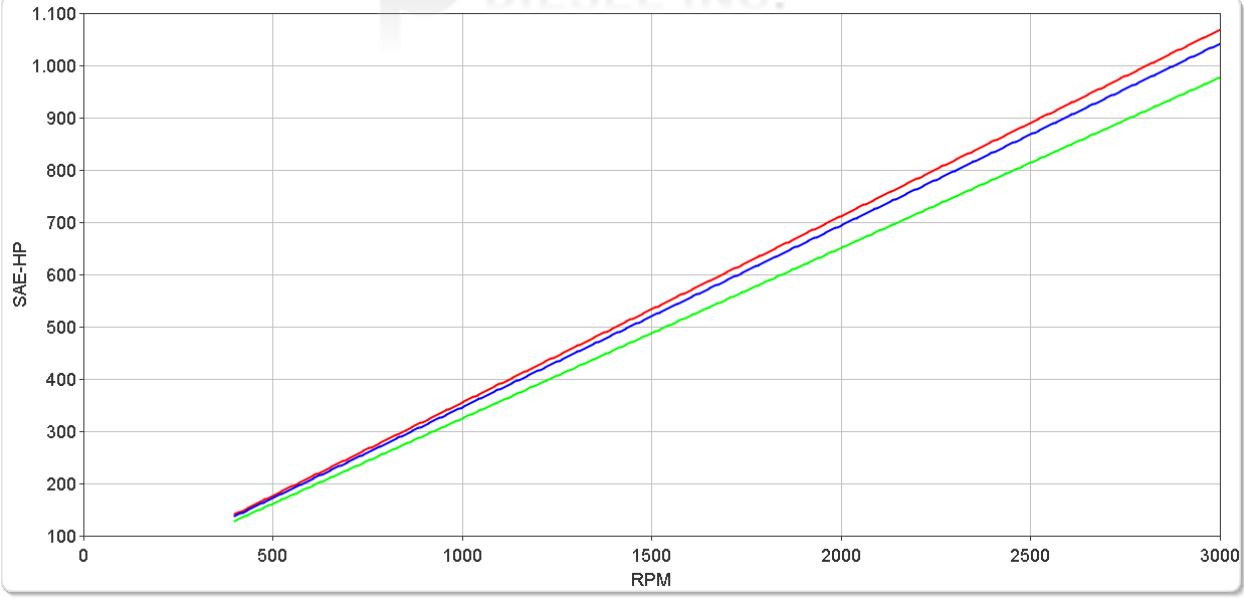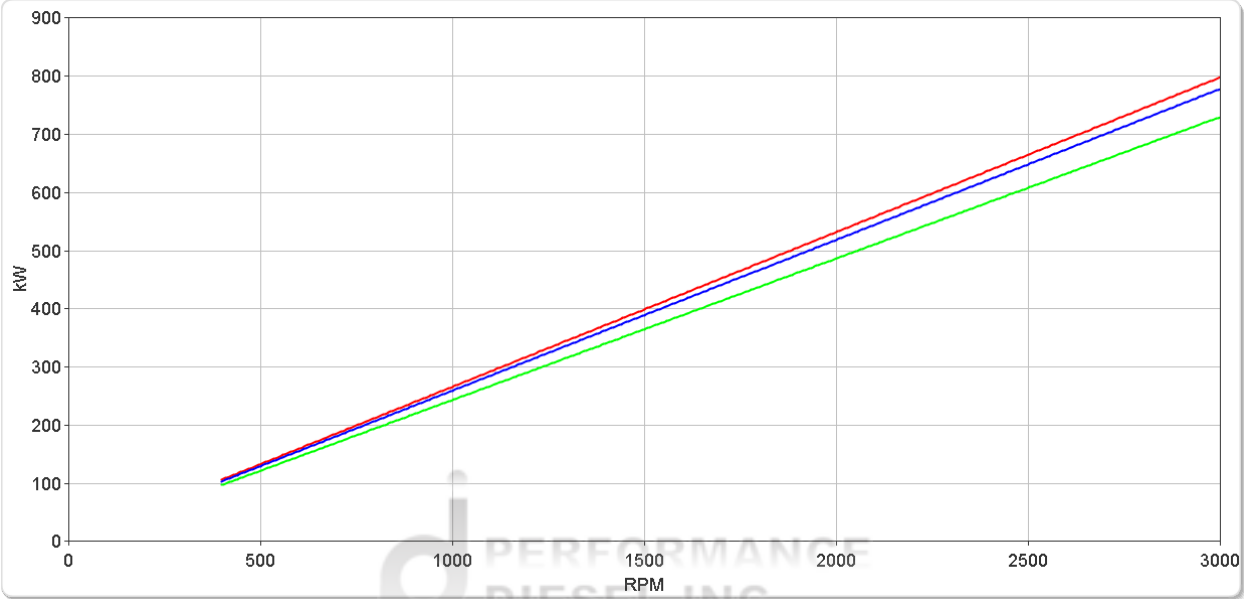



ZF 335 A

Ratings

Medium Duty

RATIOS	MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	Nm	ftlb	kW	hp	1800 rpm		2100 rpm		2300 rpm		
					kW	hp	kW	hp	kW	hp	
1.441, 1.594, 1.767, 1.964	2034	1500	0.2130	0.2856	383	514	447	600	490	657	3000
2.192	1840	1357	0.1927	0.2584	347	465	405	543	443	594	3000
2.458	1701	1255	0.1781	0.2389	321	430	374	502	410	549	3000

* Special Order Ratio.

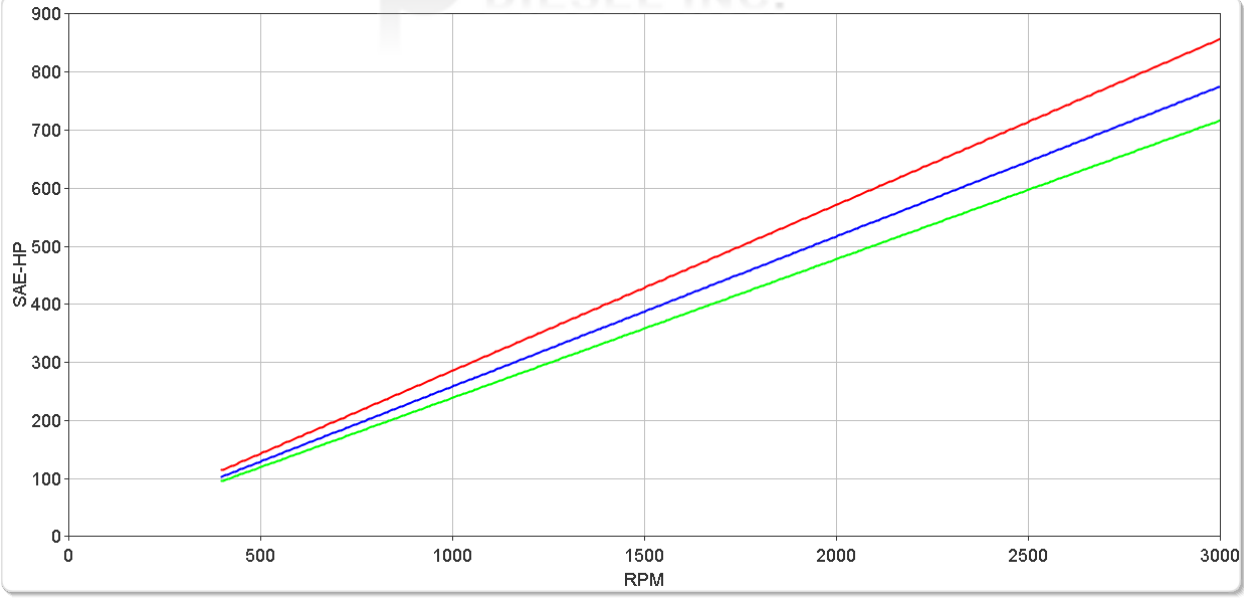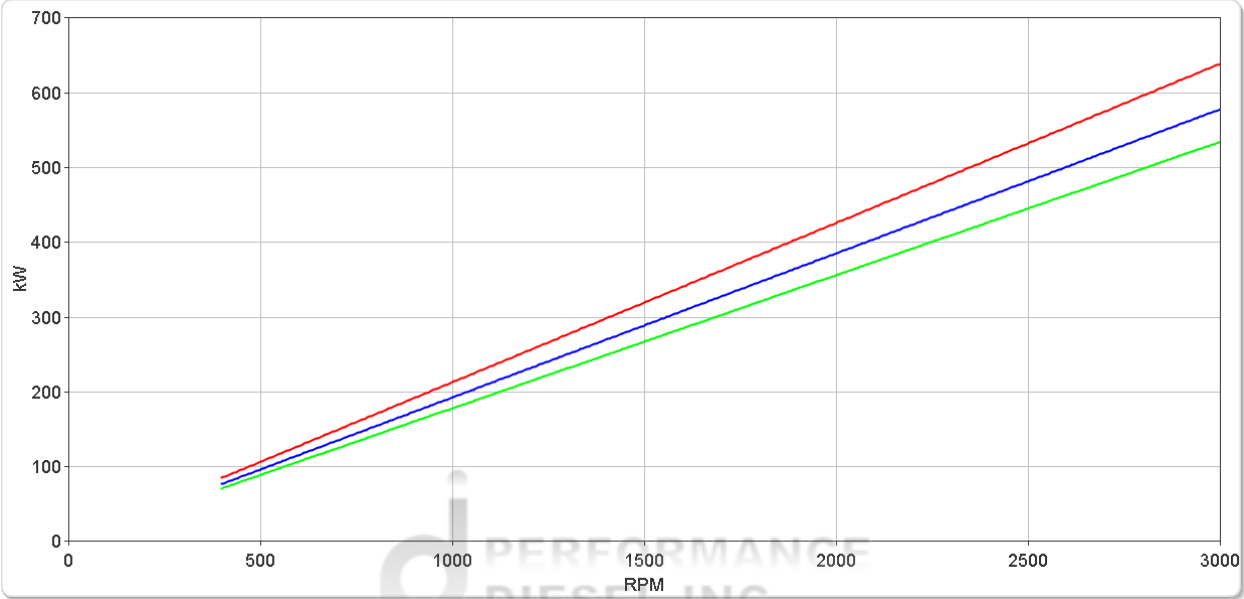



ZF 335 A

Ratings

Continuous Duty



RATIOS	MAX. TORQUE		POWER/RPM		INPUT POWER CAPACITY						MAX. RPM
	Nm	ftlb	kW	hp	1600 rpm		1800 rpm		2100 rpm		
					kW	hp	kW	hp	kW	hp	
1.441, 1.594, 1.767, 1.964, 2.192	1721	1269	0.1802	0.2417	288	387	324	435	378	507	3000
2.458	1623	1197	0.1699	0.2279	272	365	306	410	357	479	3000

* Special Order Ratio.

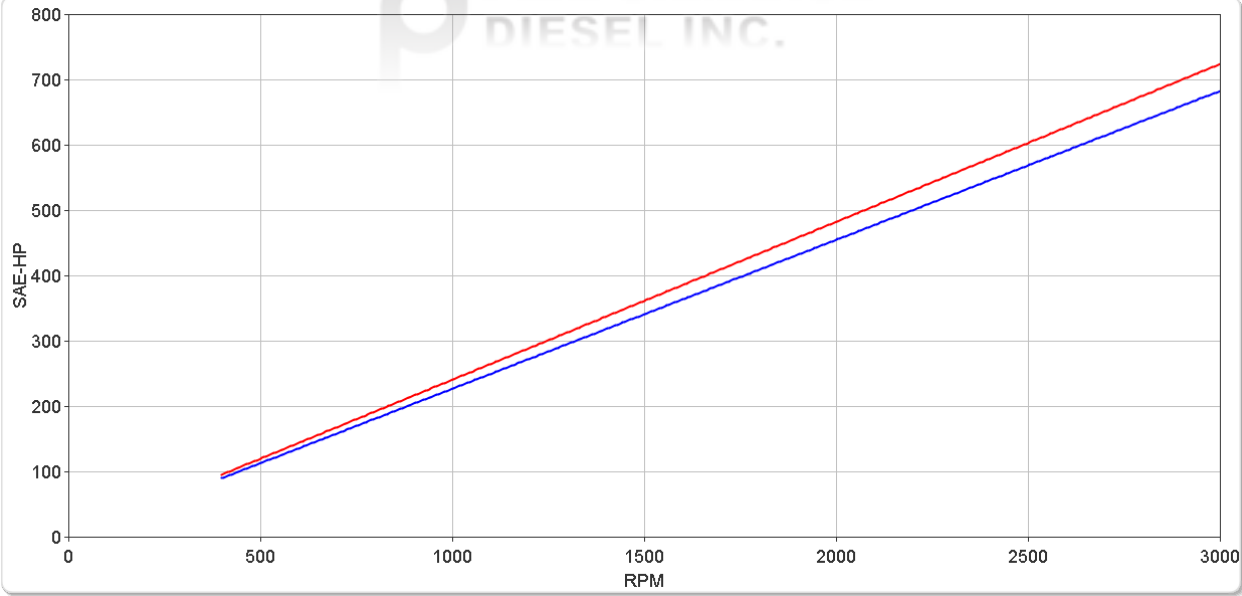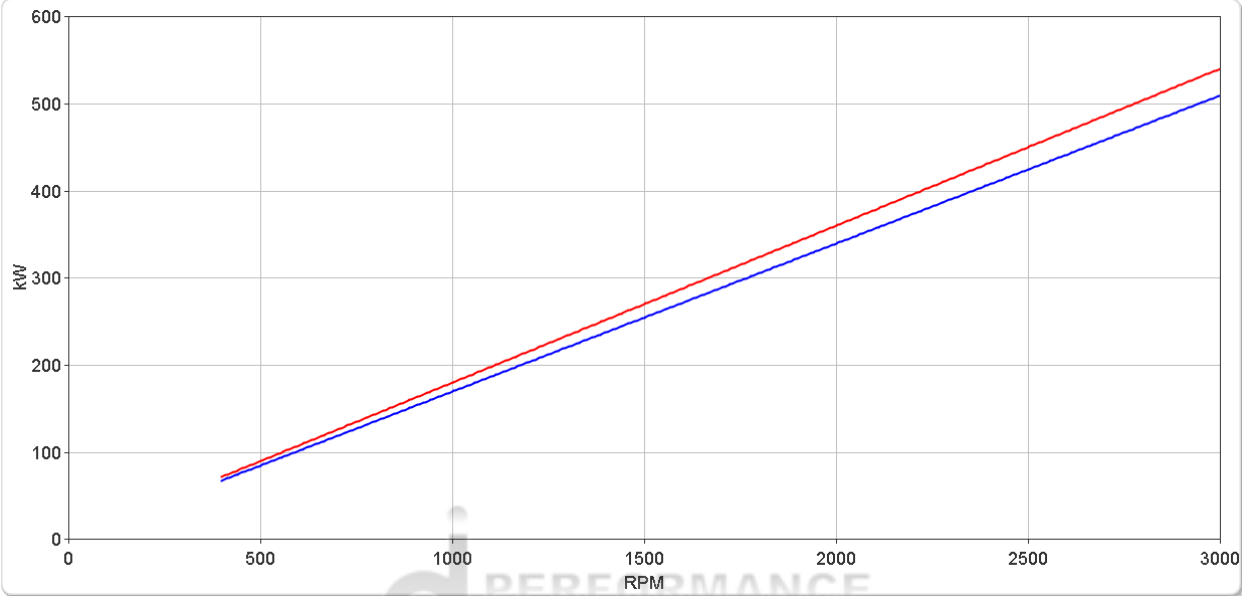

ZF 335 A


Dimensions

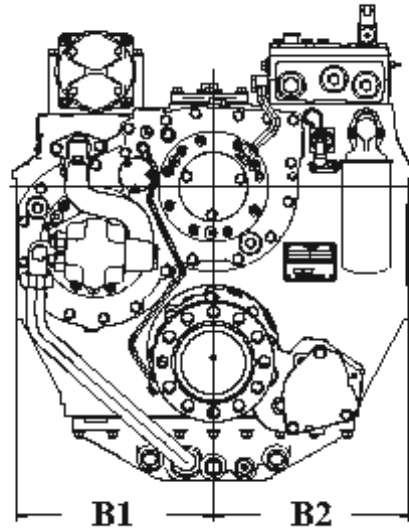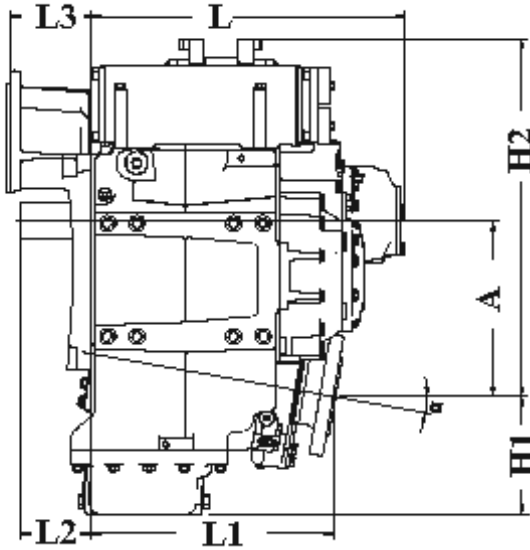

mm (inches)										
Angle	A	B ₁	B ₂	H ₁	H ₂	L	L ₁	L ₂	L ₃	Bell Hsg.
7.0	183 (7.20)	265 (10.4)	265 (10.4)	140 (5.51)	348 (13.7)	545 (21.4)	420 (16.5)	-	-	
Weight kg (lb)						Oil Capacity Litre (US qt)				
159 (350)						6.00 (6.30)				


SAE Bell Housing Dimensions

SAE No.	A		B		C		Bolt Holes No.	Bolt Holes Diameter	
	mm	in	mm	in	mm	in		mm	in
1	511.18	20.125	530.23	20.875	552.45	21.75	12	11.91	15/32



Output Coupling Dimensions

A		B		C		D		Bolt Holes No.	Bolt Holes Diameter (E)	
mm	in	mm	in	mm	in	mm	in		mm	in
205	8.07	170	6.69	140	5.51	20.0	0.79	10	18.2	0.72

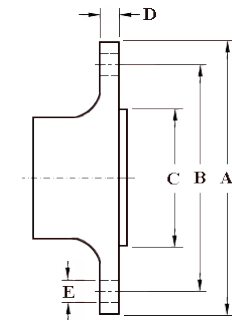

Duty Definitions

PLEASURE DUTY DEFINITION	Highly intermittent operation with very large variations in engine speed and power
Average engine operating hours limit:	500 hours/year 300 hours/year for mechanical gearboxes
Typical hull forms:	Planing.
Typical applications:	Private, non-commercial, non-charter sport/leisure activities.
LIGHT DUTY DEFINITION	Intermittent operation with large variations in engine speed and power
Average engine operating hours limit:	2500 hours/year (for hydraulic gearboxes smaller than the ZF 650 series, 2000 hours/year).
Typical hull forms:	Planing and semi-displacement.
Typical applications:	Private and charter, sport/leisure activities, naval and police activities.
MEDIUM DUTY DEFINITION	Intermittent operation with some variations in engine speed and power
Average engine operating hours limit:	4000 hours/year. 3500 hours/year for gearboxes smaller than ZF 2000 series and workboat ZF W2700 series.
Typical hull forms:	Semi-displacement and displacement
Typical applications:	Charter and commercial craft (example: crew boats and fast ferries), and naval and police activities.
CONTINUOUS DUTY DEFINITION	Continuous operation with little or no variations in engine speed and power
Average engine operating hours limit:	Unlimited
Typical hull forms:	Displacement.
Typical applications:	Heavy duty commercial vessels, tugs, fishing boats.

Duty Ratings

Ratings apply to marine diesel engines at the indicated speeds. At other engine speeds, the respective power capacity (kW) of the transmission can be obtained by multiplying the Power/Speed ratio by the speed.

Approximate conversion factors:

1 kW = 1.36 metric hp

1 kW = 1.34 U.S. hp (SAE)

1 U.S. hp = 1.014 metric hp

1 Nm = 0.74 lb.ft.

Ratings apply to right hand turning engines, i.e. engines having counterclockwise rotating flywheels when viewing the flywheel end of the engine.

These ratings allow full power through forward and reverse gear trains, unless otherwise stated.

Contact your nearest ZF Sales and Service office for ratings applicable to gas turbines, gasoline (petrol) engines, as well as left hand turning engines, and marine transmissions for large horsepower capacity engines.

Ratings apply to marine transmissions currently in production or in development and are subject to change without prior notice.

NOTE: THE MAXIMUM RATED INPUT POWER MUST NOT BE EXCEEDED (SEE RESPECTIVE RATINGS IN THE TECHNICAL DATA SHEETS)

Safe Operating Notice

The safe operation of ZF products depends upon adherence to technical data presented in our brochures. Safe operation also depends upon proper installation, operation and routine maintenance and inspection under prevailing conditions and recommendations set forth by ZF. Damage to transmission caused by repeated or continuous emergency manoeuvres or abnormal operation is not covered under warranty. It is the responsibility of users and not ZF to provide and install guards and safety devices, which may be required by recognized safety standards of the respective country (e.g. for U.S.A. the Occupational Safety Act of 1970 and its subsequent provisions).

Monitoring Notice

The safe operation of ZF products depends upon adherence to ZF monitoring recommendations presented in our operating manuals, etc. It is the responsibility of users and not ZF to provide and install monitoring devices and safety interlock systems as may be deemed prudent by ZF. Consult ZF for details and recommendations.

Torsional Responsibility and Torsional Couplings

The responsibility for ensuring torsional compatibility rests with the assembler of the drive and driven equipment. ZF can accept no liability for gearbox noise caused by vibrations or for damage to the gearbox, the flexible coupling or to other parts of the drive unit caused by this kind of vibration. Contact ZF for further information and assistance. ZF recommends the use of a torsional limit stop for single engine powered boats, wherein loss of propulsion power can result in loss of control. It is the buyer's responsibility to specify this option, which can result in additional cost and a possible increase in installation length.

ZF can accept no liability for personal injury, loss of life, or damage or loss of property due to the failure of the buyer to specify a torsional limit stop. ZF selects torsional couplings on the basis of nominal input torque ratings and commonly accepted rated engine governed speeds. Consult ZF for details concerning speed limits of standard offering torsional couplings, which can be less than the transmission limit. Special torsional couplings may be required for Survey Society Ice Classification requirements.